


ROLF BRITE TANK BT - Air-cooled, non-insulated

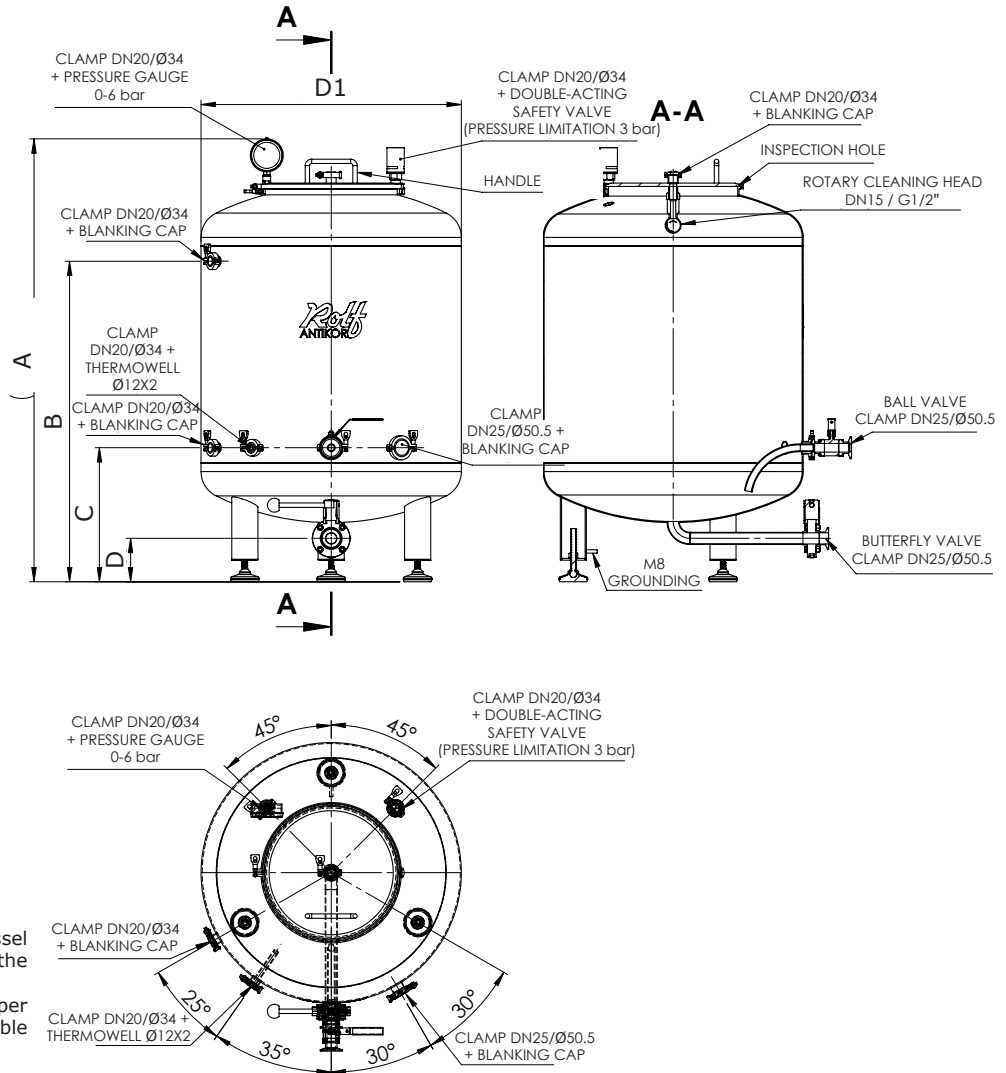

- A brite tank as a non-insulated pressure vessel with a bottom dished head intended for the maturation and bottling of a beer.
- Design with an inspection hole in the upper dished head - for dimensions see the table below.
- Brite tank with 3 tubular adjustable legs.
- Brite tanks are manufactured and tested according to Directive 2014/68/EU (PED).
- The passport of the pressure vessel is included.

Type	BT 30	BT 50	BT 75	BT 100	BT 150	BT 200	BT 300
Material	AISI 304						
Max. operating pressure [bar]	3						
Max. operating temperature / sanitizing temperature [°C]	30 / 80						
Interior finish [µm]	Ra 0.8						
Exterior finish	240 grit						
Warranty	5 years						

Type		BT 30	BT 50	BT 75	BT 100	BT 150	BT 200	BT 300
Order number		537003	537005	537007	537010	537015	537020	537030
Operating volume	V [L]	30	50	75	100	150	200	300
Total volume	Vc [L]	34	59	85	107	189	245	328
Diameter	ØD1 [mm]	365	365	365	480	600	600	600
Total height	A [mm]	615	865	1,115	900	1,020	1,220	1,520
	B [mm]	410	660	910	680	740	940	1,240
	C [mm]	230	230	230	250	310	310	310
	D [mm]	100	100	100	100	100	100	100
Inspection hole	[-]/[mm]	DN200/Ø217.5	DN200/Ø217.5	DN200/Ø217.5	DN200/Ø217.5	DN300/Ø319	DN300/Ø319	DN300/Ø319
Net weight	m [kg]	18	24	30	29	46	54	65